


ENVIRONMENTAL DATA SHEET.

Quantum Double Butt-Glazed





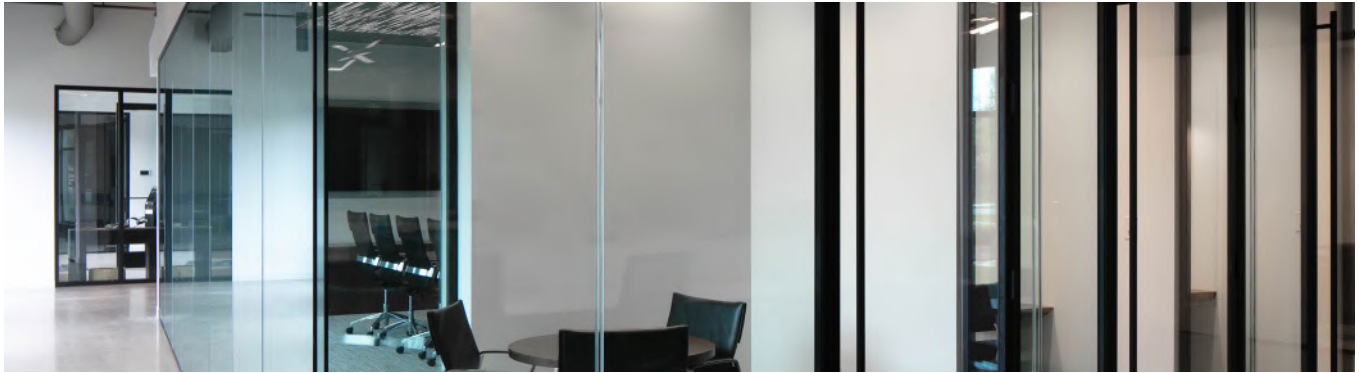

UPDATED: 5.1.24

MANUFACTURER: INFINIUM WALL SYSTEMS

MANUFACTURING LOCATION: STRONGSVILLE, OH 44149


QUANTUM PRODUCT COMPOSITION & MATERIAL SUSTAINABILITY.

BASE MATERIAL.	% BY WEIGHT.	POST CONSUMER RECYCLED CONTENT.	PRE CONSUMER RECYCLED CONTENT.	END-OF-LIFE MANAGEMENT.	
Glass	96.1%	0%	0%	Recyclable if local jurisdiction allows	
Aluminum	3.6%	31%	35%	Recyclable	
Steel	0.2%	0%	0%	Recyclable	
Plastic	0.1%	0%	0%	Recyclable if local jurisdiction allows	
TOTAL RECYCLED CONTENT.	 2.4% <ul style="list-style-type: none"> 1.1% Post Consumer 1.3% Pre Consumer 				
AIR QUALITY & VOC CONTENT.		INFINIUM Quantum Butt-Glazed partitions are SCS Indoor Advantage™ Gold certified for indoor air quality and conform to the CDPH/EHLB Standard Method (CA 1350) v1.2-2017 for the school classroom, private office, and single-family residence parameters.			
PRODUCT CIRCULARITY.		INFINIUM glass wall systems are non-structural elements that are demountable and can be salvaged or reused for future projects. For typical disposal, metal components can be recycled as metal scrap, and glass and plastic can be recycled if local jurisdiction allows.			

Disclaimer: The information and calculations presented in this document is intended to be representative of the materials, construction, and processing of a typical standard product configuration and does not factor in project specific components such as hardware, doors, and custom wall panels.

CHEMICAL INVENTORY.

Quantum Double Butt-Glazed

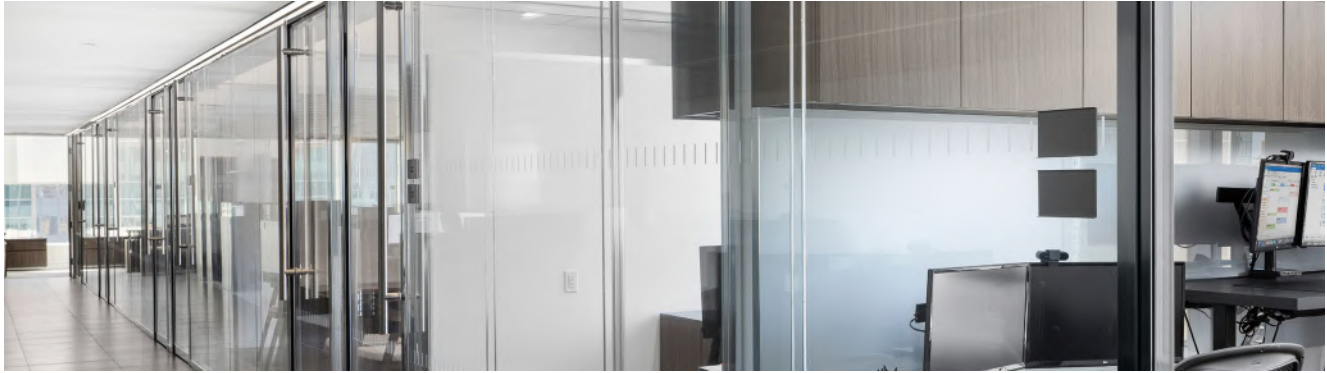

LEED V4 MATERIAL INGREDIENT CREDIT.

COMPONENT.	% OF FINAL PRODUCT.	CAS #.
Silicon Dioxide	70.2%	14808-60-7
Sodium Oxide	13.5%	1313-59-3
Aluminum	3.2%	7429-90-5
Calcium Oxide	8.6%	1305-78-8
Magnesium Oxide	2.9%	1309-48-4
Sodium Sulfate	0.6%	7757-83-7
Silicon	0.1%	7440-21-3
Iron	0.2%	1309-37-1
Magnesium	0.1%	1309-48-4
Manganese	0.1%	7439-96-5

**[OPTION 1: Manufactures Inventory]
REPORTING THRESHOLD: 1000 PPM.**

Disclaimer: The information and calculations presented in this document is intended to be representative of the materials, construction, and processing of a typical standard product configuration and does not factor in project specific components such as hardware, doors, and custom wall panels.